




GRABO

FORTIS 1.5

NON-DIRECTIONAL HOMOGENEOUS FLOOR COVERING



SILVER

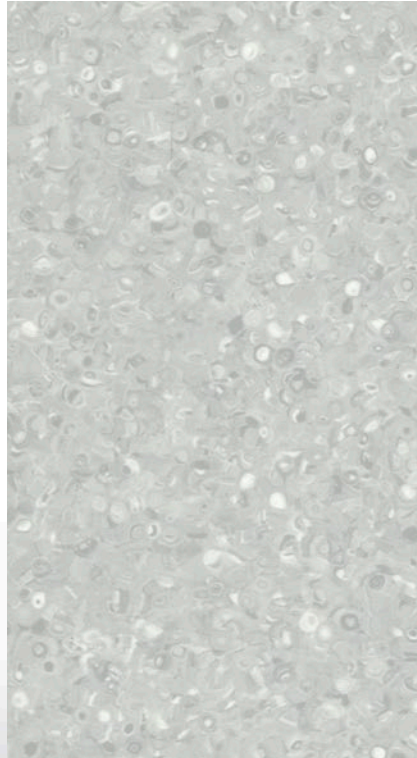

FOG



STEEL





GRABO

FORTIS 1.5



SPECIFICATIONS

CONSTRUCTION	STANDARDS	FORTIS 1.5
DESCRIPTION		
Construction		homogeneous
Binder content	EN ISO 10581	Type I.
Total thickness	EN ISO 24346	1.5 mm
Wear layer thickness	EN ISO 24340	1.5 mm
Width of roll	EN ISO 24341	2 m
Length of rolls	EN ISO 24341	20 lm
Total weight	EN ISO 23997	2.1 kg/m ²
CLASSIFICATION		
Product specification	EN 649	✓
European classification	EN ISO 10874	Class 32/41
Residual indentation	EN ISO 24343	max 0.1 mm
Dimensional stability	EN ISO 23999	max 0.2 %
Light fastness	EN ISO 105-B02	grade 6
PERFORMANCE		
Abrasion group	MSZ EN 660-1	T
Fire resistance	EN 13501-1	Class: Bfl-s1
Slip resistance	DIN 51130	R9
	EN 13893	Class: DS
Electrical resistance	EN 1815	< 2 kV
Chemical resistance	EN ISO 26987	✓
Castor chair resistance	EN ISO 4918	✓
Surface treatment		iGuard PUR Surface
Hygiene		Bacterial resistant
Seaming method		heat or cold weld

Total thickness
1.5 mm

Dimensional stability
max. 0.2%

Total weight
2.1 kg/m²

PERFORMANCE FEATURES & BENEFITS

- Excellent abrasion resistance
- Unique non-directional design
- Low residual indentation
- Easy cleaning and maintenance thanks to iGuard PUR Surface
- Anti-bacterial
- Antistatic

RECOMMENDED USAGE

- Healthcare • Education
- Offices • Other public areas


ENVIRONMENTAL ATTRIBUTES

- Phthalate free
- Solvent free
- Heavy metal free
- 100% recyclable
- NO WAX product
- No waste technology

CONSTRUCTION

- 1 iGuard PUR Surface
- 2 Non-directional homogeneous layer

! Fortis 1.5 is available in all additional Fortis color with the minimum quantity of 4000 sqm.

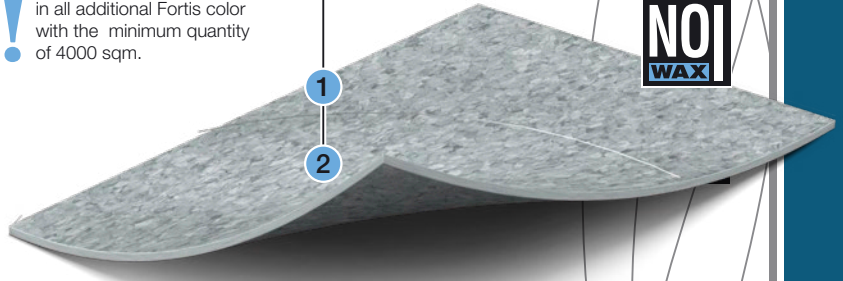

ECOLOGICAL FORMULA



GRABOPLAST

Floor Covering Manufacturers Ltd.

H-9023 Győr, Fehérvári út. 16/b. Telefon: (+36) 96 506-100

www.graboplast.com



www.facebook.com/graboplast

